
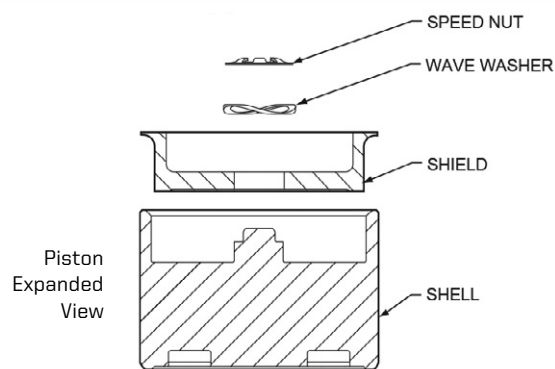


Wilwood's Exclusive Thermlock[®] Pistons

Thermlock[®] pistons provide the most effective thermal barrier available for minimizing heat transfer from the brake pads to the caliper body, seals and fluid. This innovative multi-part design incorporates a stainless steel shield and coated aluminum shell configuration that effectively retards heat transfer by at least 25 percent. This reduction in operating temperature eliminates seal crystallization and localized fluid boiling, which decreases distortion in the caliper body and piston bores, extending overall service life.

This technology was originally developed for the extreme temperatures and sustained high heat in NASCAR and professional road racing brake systems.

Thermlock[®] pistons are standard equipment in all Wilwood Racing caliper models, and are available as service replacements or upgrades in most current and older Wilwood calipers.

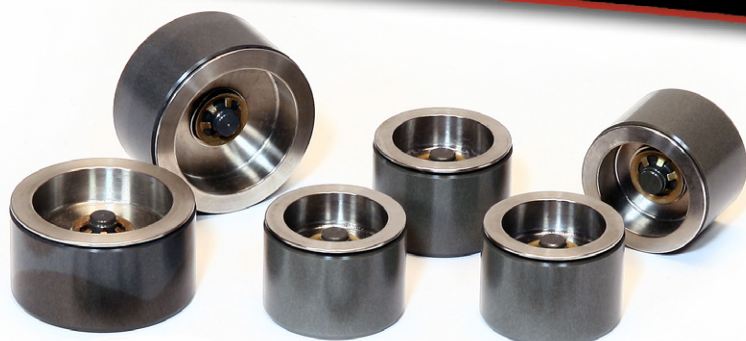

ORDERING INFORMATION: PH: 805.388.1188 • FAX: 805.388.4938 • wilwood.com • info@wilwood.com

PART NUMBER	DESCRIPTION	DIAMETER	LENGTH
200-7550	Aerolite 6/4R, Superlite	1.88"	1.05"
200-13998	GN6R with 1.00" Thick Brake Pad	1.75"	1.25"
200-7551	XT6R, Aerolite 6/4R, SL, NDL, NDP, GN III, GN6R	1.75"	1.05"
200-7552	TC6R, Dynalite, DynaPro, WLD-20	1.75"	0.88"
200-7553	XT6R, Aerolite 6/4R, Superlite, NDL, NDP	1.62"	1.05"
200-9615	TC6R, BNSL6R, Dynalite, DynaPro	1.62"	0.88"
200-16086	Aerolite 6/4R	1.50"	1.05"
200-14000	GN6R with 1.00" Wide Brake Pad	1.38"	1.25"
200-7554	XT6R, Aerolite 6/4R, SL, NDL, NDP, GN III, DPR, GN6R	1.38"	1.05"
200-9616	TC6R, Dynalite, DynaPro	1.38"	0.88"
200-15451	Powerlite	1.38"	0.82"
200-7555	Aerolite 6/4R, Superlite, IR-GT	1.25"	1.05"
200-11343	TC6R, Dynalite, DynaPro	1.25"	0.88"
200-15449	Powerlite	1.25"	0.82"
200-7556	XT6R, Aerolite 6/4R, Superlite, IR-GT, NDL, NDP	1.12"	1.05"
200-11342	TC6R, BNSL6R, Dynalite, DynaPro	1.12"	0.88"