



# Compact Combination Master Cylinder Kits

Wilwood's Compact Combination Master Cylinders have been fully redesigned for limited space applications requiring the output capacity of a full size master cylinder.

- **Over 2" Additional Clearance** - Compared to full size combination master cylinders, the ultra short 3.37" compact body provides 2.16" of additional clearance between the mounting flange and the fluid outlet.
- **No Loss Of Volume Or Stroke Capacity** - A full 1.12" of piston stroke meets or exceeds the stroke capacity of most full size cylinders.
- **Simplified Plumbing** - 1/8" NPT outlets provide a positive seal and reduce the potential for stripped threads.
- **Simplified Bleeding** - Fluid outlet ports located at the top radius of the cylinder bore reduce the chances for trapped air and eliminate the need for body mounted bleed screws.



**Compact Combination Master Cylinder**  
(Shown with Large (10 oz) Reservoir, Direct Mounted)

- **Instant Response** - Extreme close tolerance cut-off and equalization ports deliver immediate activation without wasted pedal travel.
- **Positive Release** - Extra heavy rate internal return springs provide smooth operation and firm, positive release.
- **Cool Running** - Reduced external surface area and a composite fluid reservoir minimize absorption of external radiant heat.
- **Tested Tough** - Proven durable with piston, bore, and seal designs tested to survive over 100,000 cycles.
- **Versatile** - 4 mounting options with choices for direct or remote mounting of 7 or 10 ounce reservoirs that include an impact resistant threaded cap with an internal baffle and seals.
- **Corrosion Free** - Black E-Coated aluminum bodies resists corrosion and maintain a durable long lasting finish.

## ORDERING INFORMATION:

BORE SIZE	COMPLETE KIT WITH RESERVOIRS	MASTER CYLINDER ONLY	REBUILD KIT
5/8" (15,9)	260-10371	260-10281	260-10513
3/4" (19,1)	260-10372	260-10282	260-10514
13/16" (20,6)	260-10373	260-10283	260-10515
7/8" (22,2)	260-10374	260-10278	260-10516
1" (25,4)	260-10375	260-10279	260-10517
1-1/8" (28,6)	260-10376	260-10280	260-10518

## Minimum Mounting Requirements and Variations

### Four Different Master Cylinder Combinations Available in One Kit

Wilwood's new compact combination master cylinder kit can be mounted with the reservoir on the master cylinder body "direct mount" (Figure 1), or the reservoir positioned at a convenient remote location "remote mount" (Figure 2), and then connected via a flexible hose.

Both versions can utilize either a large or small mount reservoir (included in the kit), as your application warrants. Refer to Figure 3 for the minimum mounting requirements before installation begins.

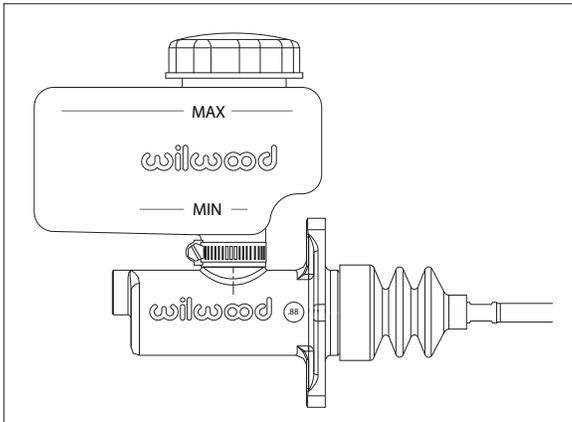


Figure 1. Direct Mounted Master Cylinder

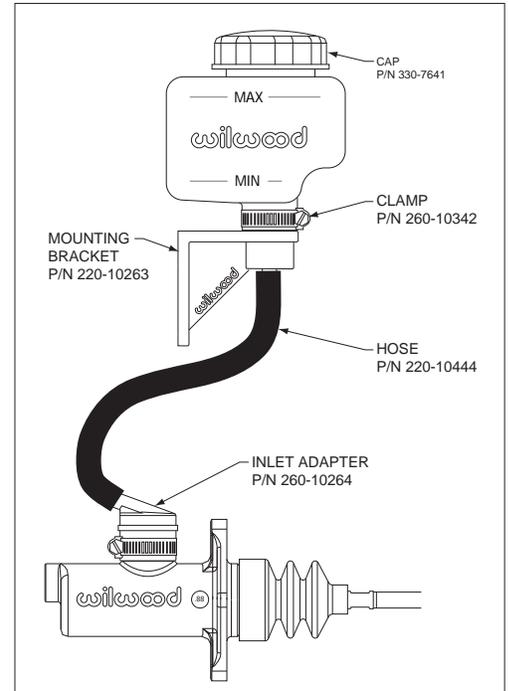


Figure 2. Remote Mounted Master Cylinder

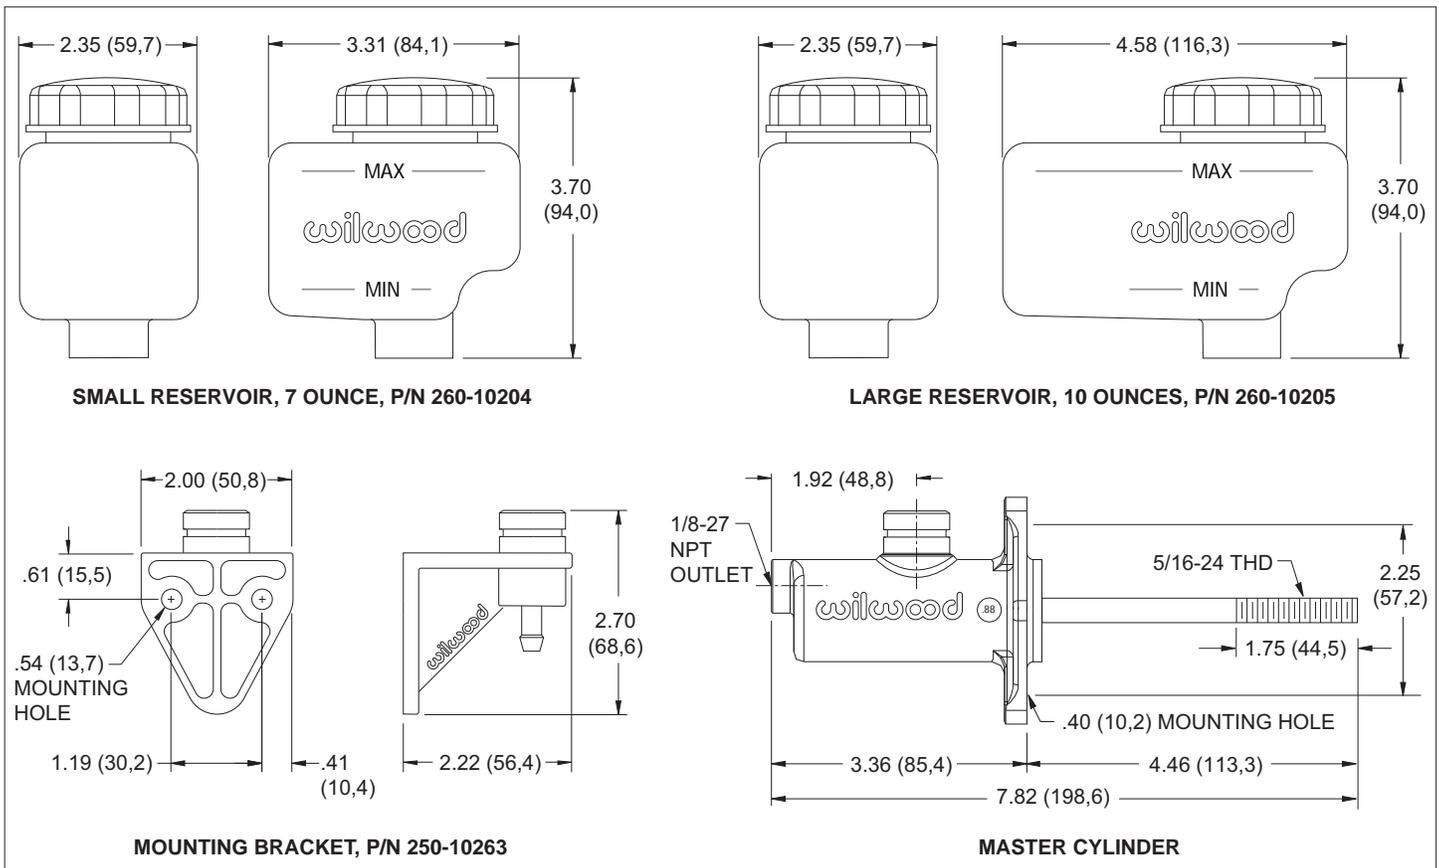


Figure 3. Minimum Mounting Requirements for Mounting Bracket, Master Cylinder and Reservoirs