

FORGED SUPERLITE 4R/6R RADIAL MOUNT CALIPERS

FSL6R

Wilwood Superlite (FSLR) radial mount calipers combine state-of-the-art forged caliper technology, with track-proven performance options for oval track, off-road, and road course competition. Premium grade billet, stress flow forging, and a highly efficient overall design, make the FSLR calipers as strong as any design in its class, including one-piece calipers.



CALIPER FEATURES:

- Four and six piston models for .81" or 1.25" width rotors cover the full range of front and rear applications
- High strength, lightweight, reinforced bridge forged billet aluminum radial mount body, with a removable center bridge pad retention bolt, provide maximum resistance to deflection and body separation under load
- Choice of Thermlock® or stainless steel pistons with high temperature seals for maximum heat protection and reliability
- Uses 20mm thick type 7420 brake pads
- Internal dampening springs to control piston knock back and excessive retraction on Thermlock® equipped models
- Recessed pocket design to protected bleed screws
- Internal fluid ports eliminate all problems and damage potential associated with external fluid tubes

ORDERING INFORMATION: PH: 805.388.1188 • FAX: 805.388.4938 • wilwood.com • info@wilwood.com


PART NUMBER	DESCRIPTION	FINISH
120-13235	FSL6R: Right Hand: Piston Sizes: 1.62" / 1.12" / 1.12" Disc Width: 1.25" Piston Type: Stainless	Hard Anodized
120-13236	FSL6R: Left Hand: Piston Sizes: 1.62" / 1.12" / 1.12" Disc Width: 1.25" Piston Type: Stainless	Hard Anodized
120-13237	FSL6R: Right Hand: Piston Sizes: 1.62" / 1.12" / 1.12" Disc Width: 0.81" Piston Type: Stainless	Hard Anodized
120-13238	FSL6R: Left Hand: Piston Sizes: 1.62" / 1.12" / 1.12" Disc Width: 0.81" Piston Type: Stainless	Hard Anodized
120-13267	FSL6R/ST: Right Hand: Piston Sizes: 1.62" / 1.12" / 1.12" Disc Width: 1.25" Piston Type: Thermlock®	Hard Anodized
120-13268	FSL6R/ST: Right Hand: Piston Sizes: 1.62" / 1.12" / 1.12" Disc Width: 1.25" Piston Type: Thermlock®	Hard Anodized

FORGED SUPERLITE 4R/6R RADIAL MOUNT CALIPERS


ORDERING INFORMATION: PH: 805.388.1188 • FAX: 805.388.4938 • wilwood.com • info@wilwood.com

PART NUMBER	DESCRIPTION	FINISH
120-13227	FSL4R: Right Hand: Piston Sizes: 1.88" / 1.75" Disc Width: 1.25" Piston Type: Stainless	Hard Anodized
120-13228	FSL4R: Left Hand: Piston Sizes: 1.88" / 1.75" Disc Width: 1.25" Piston Type: Stainless	Hard Anodized
120-13229	FSL4R: Right Hand: Piston Sizes: 1.88" / 1.62" Disc Width: 1.25" Piston Type: Stainless	Hard Anodized
120-13230	FSL4R: Left Hand: Piston Sizes: 1.88" / 1.62" Disc Width: 1.25" Piston Type: Stainless	Hard Anodized
120-13232	FSL4R: Right / Left Hand: Piston Sizes: 1.25" / 1.25" Disc Width: 1.25" Piston Type: Stainless	Hard Anodized
120-13233	FSL4R: Right / Left Hand: Piston Sizes: 1.25" / 1.25" Disc Width: 0.81" Piston Type: Stainless	Hard Anodized
120-13234	FSL4R: Right / Left Hand: Piston Sizes: 1.12" / 1.12" Disc Width: 0.81" Piston Type: Stainless	Hard Anodized
120-13263	FSL4R: Right Hand: Piston Sizes: 1.88" / 1.75" Disc Width: 1.25" Piston Type: Thermlock®	Hard Anodized
120-13264	FSL4R: Left Hand: Piston Sizes: 1.88" / 1.75" Disc Width: 1.25" Piston Type: Thermlock®	Hard Anodized
120-13265	FSL4R: Right Hand: Piston Sizes: 1.88" / 1.62" Disc Width: 1.25" Piston Type: Thermlock®	Hard Anodized
120-13266	FSL4R: Left Hand: Piston Sizes: 1.88" / 1.62" Disc Width: 1.25" Piston Type: Thermlock®	Hard Anodized
120-13575	FSL4R: Right / Left Hand: Piston Sizes: 1.25" / 1.25" Disc Width: 0.81" Piston Type: Thermlock®	Hard Anodized
120-13576	FSL4R: Right / Left Hand: Piston Sizes: 1.25" / 1.25" Disc Width: 1.25" Piston Type: Thermlock®	Hard Anodized

Forged Superlite 4R/6R Caliper, Dimensional Characteristics

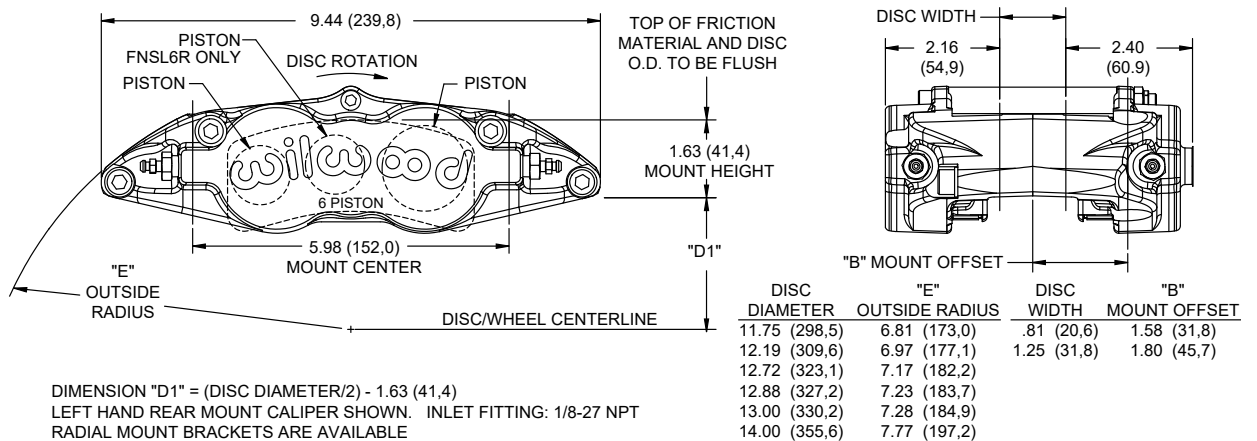

Forged Superlite 4R/6R Caliper, Type 7420 Brake Pad Dimensions and Ordering Information

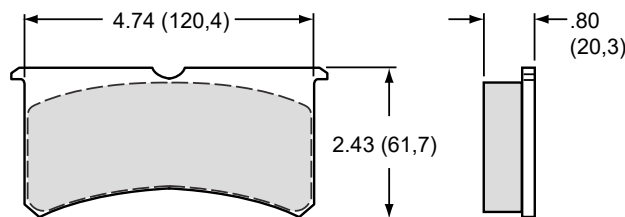

AXLE SET P/N	PAD TYPE / COMPOUND
15A - 5938K	7420 A PolyMatrix
15B - 5939K	7420 B PolyMatrix
15E - 6084K	7420 E PolyMatrix
15H - 8114K	7420 H PolyMatrix
15Q - 6829K	7420 Q PolyMatrix
150 - 8854K	7420 10 BP-10 Smart Pad
150 - 9416K	7420 20 BP-20 Smart Pad
150 - 14773K	7420 30 BP-30 Smart Pad
150 - 12245K	7420 40 BP-40 Smart Pad