



SC CALIPER SERIES

Caliper Highlights:

Designed, engineered and manufactured in the U.S.A., this floating die cast aluminum caliper is a strong, compact, inexpensive answer to the braking needs of recreational, agricultural and industrial vehicles.

Features of this single piston design include availability of either 1.06", 1.19" or 1.25" bore size, fitted dust seal to prevent ingress of environmental contamination, dual bleed fittings for versatility in mounting position and fluid inlets in M10 x 1.0 banjo.


The mounting system features corrosion resistant slide pins floating in viscoelastic rings mounted in the ears of the body for smooth, rattle-free operation. This system controls pad knock-back to retain a consistent pedal or hand lever feel throughout the life of the pads. Weight: from 1.1 pounds. Rotor thickness range: .15" to .25"





ORDERING INFORMATION:

BORE SIZE		DISC WIDTH		MOUNTING		PART NUMBER
1.25"	31,8 mm	.15" - .25"	3.8 - 6,4 mm	3.00"	76,2 mm	120-9851 - SC1
1.19"	30,2 mm	.15" - .25"	3.8 - 6,4 mm	3.00"	76,2 mm	120-7183 - SC2
1.06"	26,9 mm	.15" - .25"	3.8 - 6,4 mm	3.00"	76,2 mm	120-8787 - SC3

SC CALIPER SERIES, MOUNTING DIMENSIONS:

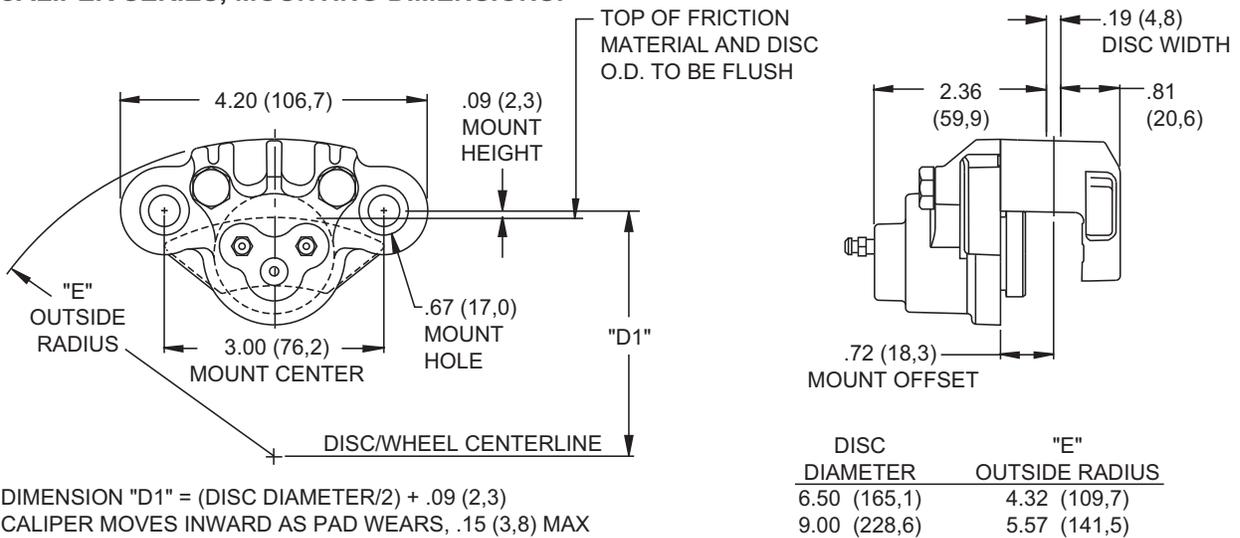

SC SERIES CALIPER PAD, PAD DIMENSIONS AND ORDERING INFORMATION:

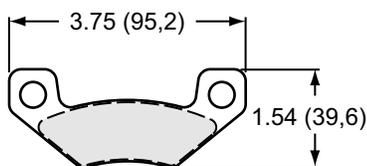

PART NO.
150-7644
150-7646

PAD DESCRIPTION
SC CALIPER PAD
SC CALIPER PAD WITH SHIM